



UK GATORLITE 3C eLED CPO-AT5 US

Operating Instructions and Important Information

Congratulations on the purchase of your Underwater Kinetics all environment work light. The UK GATORLITE 3C eLED CPO light is it is tough enough for use in rain, snow, smoke, dust or hazardous locations (see listing.)


Features

- High-intensity 3-watt white LED lasts thousands of hours without burning out
- Patented optical system reduces glare by concentrating light into the main beam with minimum side light
- Thermal Recovery System transfers heat from LED to warm batteries for better cold weather performance
- Spring loaded belt clip
- Waterproof rear pushbutton switch
- Passes 6 foot drop test
- Dustproof and watertight to 10 feet water
- Corrosion and impact resistant case
- Conforms to UL 783 and ISA 12.12.01 for hazardous location usage

Technical Data UK3C eLED CPO -AT5

- brightness: 125 lumens
- burn time: 32 hours
- batteries: 3 C/LR14 alkaline batteries
- lamp type: High-Intensity LED
- test depth: 10 (3) ft(m)
- beam travel: 500 (152) ft (m)
- size: 7.5 (190) x 1.7 (43) in (mm)
- weight: 13.5 (383) oz (g) (incl. batteries)
- materials: ABS, PC, TPU Rubber, Aluminum

UK GATORLITE 3C eLED CPO-AT

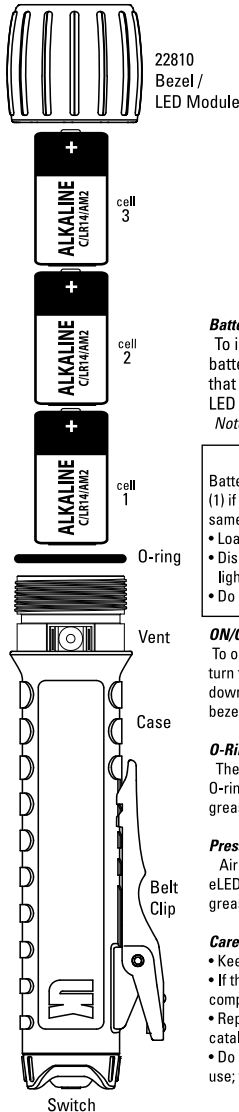

CERTIFICATION INFORMATION



CL I, II, III DIV 1 GROUP A-G, T4 ia
CONFORMS TO UL-783 & ISA 12.12.01

1. Read the instructions before use.
2. Do not open in hazardous locations.
3. Use only Part No. 22810 Bezel / LED Module.
4. Use only DURACELL MN1400, ENERGIZER EN93, or RAYOVAC 814 C/LR14 alkaline batteries
5. Manufactured by
Underwater Kinetics, 13400 Danielson Street
Poway, CA 92064 USA
tel (858) 513-9100; fax (858) 513-9111
info@uwkinetics.com

Battery Installation

To install batteries, hold the case in the position shown. Drop the batteries one by one into the case in the order shown. Make sure that the (+) end of batteries point toward the LED. Place the Bezel / LED Module on the end of the case and screw it onto the case.

Note: The light will not turn ON if the batteries are inserted improperly.

CAUTION

Batteries can vent hydrogen gas and possibly cause an explosion (1) if they are installed without the proper polarity, (2) if they are not the same type, brand name and age or (3) if they are completely discharged.

- Load batteries according to the diagram.
- Discard all batteries as soon as they are drained or no longer produce light.
- Do not mix batteries of different type, brand or age.

ON/OFF

To operate the UK 3C eLED CPO push in on the black rubber switch to turn the light ON and OFF. Make sure the bezel is screwed all of the way down or the UK 3C eLED CPO will not light. By partially unscrewing the bezel you can protect the light from turning on by accident.

O-Ring Seal

The O-ring and threads must always be kept clean. Lightly lubricate the O-ring which seals the rubber covered bezel and case with silicone grease. Remove the O-ring by hand. Do not use tools.

Pressure Equalizing Vent

Air and gas from battery leakage can pass freely in and out of the UK 3C eLED CPO light through a vent in the rear of the light. Do not allow dirt or grease to accumulate on the vent or it will not operate properly.

Care and Maintenance

- Keep area around the O-ring clean.
- If the light floods, empty it immediately, rinse with fresh water and dry completely before reassembly.
- Replace the bezel / lamp module, which contains a hydrogen absorbing catalyst, if it gets wet.
- Do not store batteries in the light for long periods of time when not in use; they may leak and damage the light.

WARRANTY

Underwater Kinetics products are engineered for maximum performance and durability. All products carry a Limited Lifetime Warranty to the original retail purchaser to be free from defective material and workmanship under normal and intended use. In addition, the Underwater Kinetics Limited Warranty covers materials used in its products to the original purchaser, from the date of purchase, as follows: plastics for 10 years; rubber for 3 years, LED and electronics for 1 year, rechargeable batteries for 90 days and lamps for 30 days.

In the event the original retail purchaser detects a defect in the material or workmanship, the product along with proof of purchase date should be returned to an authorized Underwater Kinetics dealer or directly to Underwater Kinetics with the postage prepaid. Underwater Kinetics agrees to repair or replace at Underwater Kinetics' sole discretion any product found to be defective in material or workmanship within the time period specified above. For the complete Limited Lifetime Warranty write to Underwater Kinetics or go to the web site www.uwkinetics.com.

Address all correspondence and returns to:

Underwater Kinetics, 13400 Danielson Street, Poway, CA 92064 or email info@uwkinetics.com